

****FULL TITLE****
*ASP Conference Series, Vol. **VOLUME**, **YEAR OF PUBLICATION***
****NAMES OF EDITORS****

SOLIS-VSM Solar Vector Magnetograms

C. J. Henney¹, C. U. Keller^{1,2} and J. W. Harvey¹

¹*National Solar Observatory, Tucson, Arizona, USA*

²*Sterrenkundig Instituut, Utrecht University, Utrecht, The Netherlands*

Abstract. The Vector SpectroMagnetograph (VSM) instrument has recorded full-disk photospheric vector magnetograms weekly since August 2003 as part of the Synoptic Optical Long-term Investigations of the Sun (SOLIS) project. After the full deployment of the VSM data processing system, a typical observing day will include three Fe I 630.2 nm full-disk photospheric vector magnetograms, one full-disk photospheric and three Ca II 854.2 nm chromospheric longitudinal magnetograms, along with three He I 1083 nm spectroheliograms. The photospheric vector magnetograms will be available over the Internet in two stages: first, as a quick-look product within minutes of data acquisition, and then as a Milne-Eddington inversion product within a day of each observation.

1. Introduction

The VSM is one of three instruments that constitute the SOLIS project. For a general overview of the SOLIS instruments see Keller, Harvey, & Giampapa (2003). The VSM instrument provides a unique record of solar full-disk vector magnetograms along with the high sensitivity photospheric and chromospheric longitudinal magnetograms. The VSM began recording daily full-disk magnetograms during August 2003 at a temporary site in Tucson, Arizona. In April 2004, the VSM was relocated to Kitt Peak and resumed operation in May 2004.

The VSM full-disk parametergrams are constructed from 2048 individual steps in declination of the projected solar image on the entrance slit. The observed spectrum lines would be curved due to the relatively large angular deviation of 0.57 degrees in the spectrograph. However, the slit is curved with a radius of 258.77 mm to compensate for the curvature of the 630.2 nm wavelength spectrum. The 50-cm aperture VSM utilizes a Ritchey-Chrétien optical design. This includes a two-lens field corrector to provide nearly equivalent image quality over the whole field of view with minimal geometric distortion and equal image size for all wavelengths. The VSM utilizes two interim CMOS hybrid cameras made by Rockwell Scientific. During the first year of operation, several unexpected camera signals were revealed (see Harvey et al. 2004). Two of the pronounced artifacts, a variable dark level and signal cross-talk at a 0.5 percent level, required significant modification to the data reduction pipeline.

1.1. Polarization Calibration

The optical configurations for the VSM polarization modulation measurements used to produce vector magnetograms are depicted in Figure 1. VSM vector

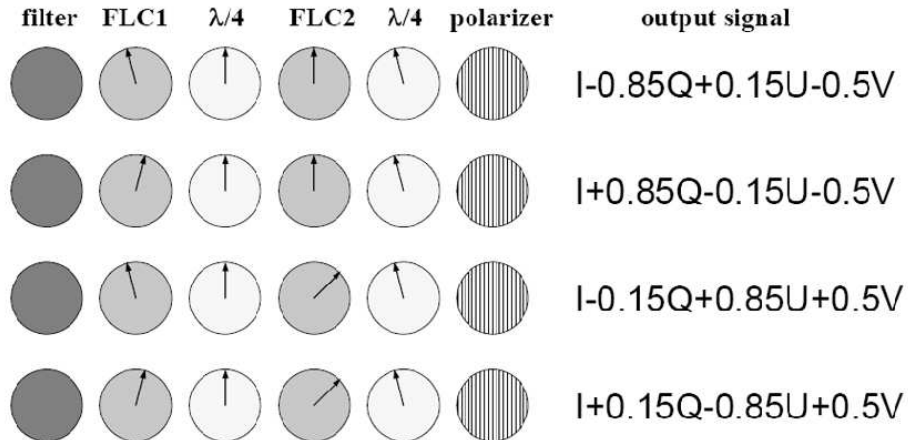


Figure 1. Illustration of the VSM optical sequence for each of the four modulation states to measure the four Stokes parameters (see text).

magnetograms are obtained using two half-wave (at 630 nm) ferroelectric liquid crystal (FLC) retarders. In front of the FLCs, off-band wavelengths are filtered out. In between and after the FLCs there are polymer quarter-wave retarders with fixed optic axes (see Figure 1). The arrows in the figure portray the relative orientations of each optic axis, where the corresponding output signals for each configuration are listed in the right-hand column.

Detailed quantitative calibration of the early VSM vector observations is nearly complete. Calibration measurements are obtained by observing at disk center while frames are accumulated with an additional polarizer and quarter-wave plate in the beam before the first FLC in Figure 1. For full-Stokes calibration, the signal matrices are estimated by positioning the polarizer and quarter-wave plate at 64 angle-positions with respect to each other and the entrance slit. In addition, the retardation and relative orientation of the fast axis of the calibration retarder are estimated.

2. VSM Data Processing

The SOLIS Data Handling System (DHS) has been designed to use pools of distributed data reduction processes that are allocated to different observations on 10 dual-CPU Linux boxes (see Wampler 2002; Jones et al. 2002). The SOLIS data transmission and storage resources are such that the reduction of VSM data is performed at the observing site on Kitt Peak. Reduced data products are transmitted via a 45 Mb/s link from Kitt Peak to the National Solar Observatory's digital archive in Tucson. Currently, the raw data is archived for planned reprocessing during 2006. However, during nominal operation the profile data will be deleted after 24 hours.

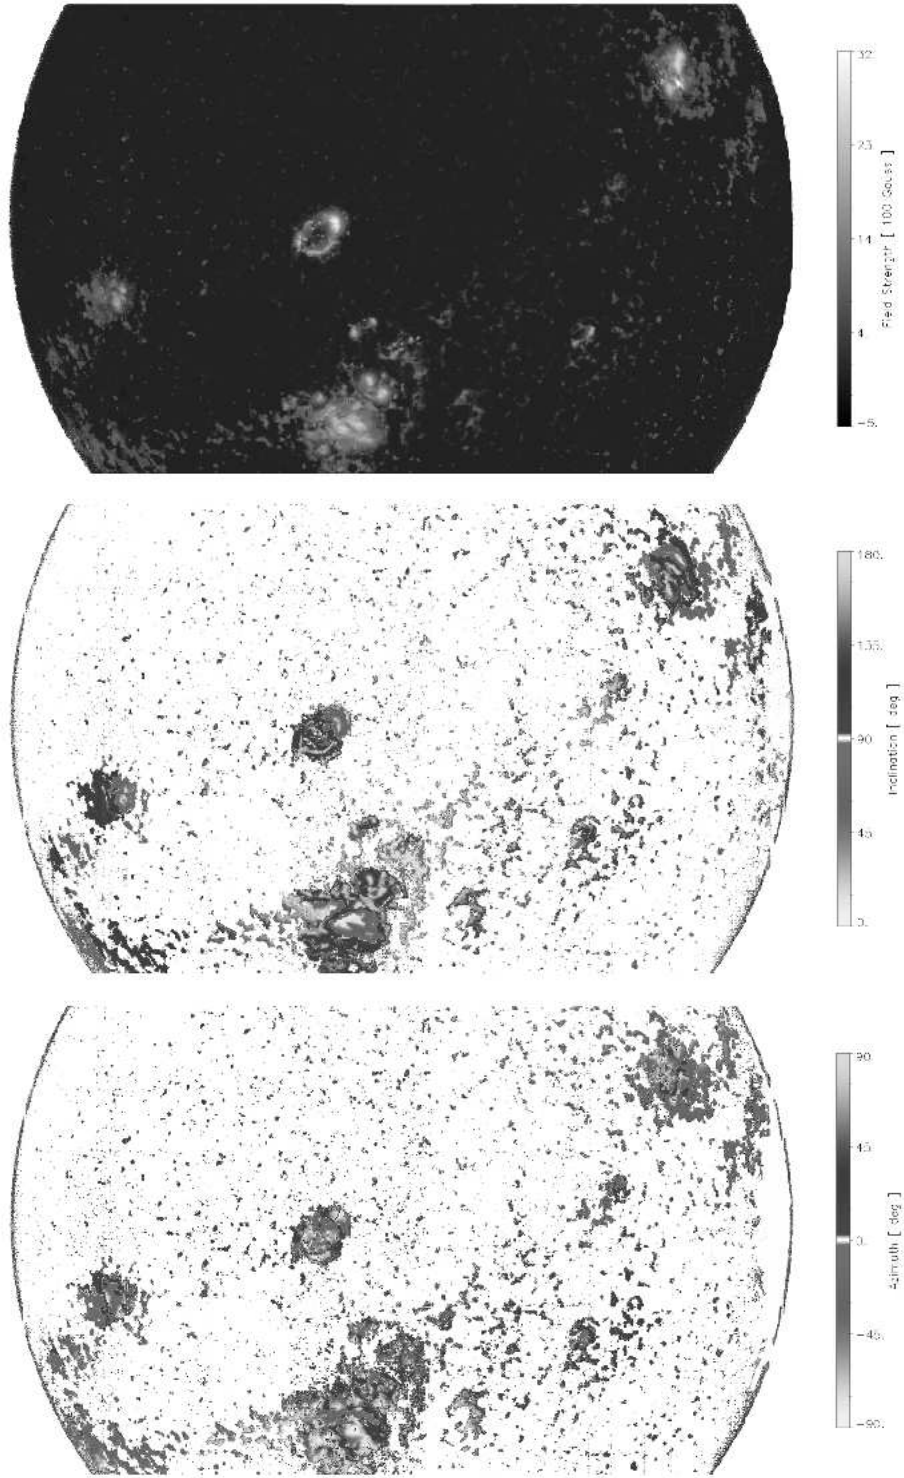


Figure 2. Inferred magnetic field strength (top), inclination (middle), and azimuth (bottom) from a SOLIS-VSM area-scan observation on 27/10/2003.

2.1. Stokes Inversion

During a typical observing day three full-disk photospheric vector magnetograms will be available over the Internet in two stages: first, as a “quick-look” (QL) product within 10 minutes of data acquisition, and then as a Milne-Eddington (ME) inversion product within 24 hours of each observation. The quick-look parameters include estimates of the magnetic field strength, inclination, and azimuth. The QL inclination and azimuth determination is estimated following Auer, Heasley & House (1977). Whereas, the magnetic field strength is approximated by using the estimated inclination with the measured line-of-sight (LOS) field strength and assumption that the fill-factor is 1. The LOS field strength is estimated using the center-of-gravity method (Rees & Semel 1979). The high-precision vector parameters are determined with the High Altitude Observatory ME inversion technique implemented by Skumanich & Lites (1987). Example ME parameter images from a VSM area-scan observed 27 October 2003 are displayed in Figure 2. Initially, the vector data products will not include azimuth disambiguation until suitable algorithms have been developed. However, the flexible design of the VSM data handling system can incorporate azimuth disambiguation and additional future improvements under consideration (e.g. principal component analysis).

3. VSM Data Products

New data products from VSM observations since August 2003 are expected to become available during 2006. These products include full-disk vector magnetograms, Dopplergrams, equivalent width and line depth images. Carrington rotation and daily synoptic maps are now available for the photospheric magnetograms. Daily coronal hole estimate images derived from VSM data, along with coronal hole synoptic maps, are available. The VSM synoptic data products are available on the NSO-SOLIS web site at: <http://solis.nso.edu/>.

4. Acknowledgments

The authors acknowledge many years of dedicated effort by the SOLIS team. We are also grateful to K.D. Leka for numerous helpful discussions. SOLIS VSM data used here are produced cooperatively by NSF/NSO and NASA/GSFC. The National Solar Observatory is operated by AURA, Inc. under a cooperative agreement with the National Science Foundation.

References

- Auer, L. H., Heasley, J. N., & House, L. L. 1977, *Solar Physics*, 55, 47
- Harvey, J., Keller, C., Cole, L., Tucker, R., & Jaksha, D. 2004, *Proc. SPIE*, 5171, 258
- Jones, H. P., Harvey, J. W., Henney, C. J., Hill, F., & Keller, C. U. 2002, *Proc. IAU Colloq.* 188, ESA SP-505, 15
- Keller, C. U., Harvey, J. W. & Giampapa, M. S. 2003, *Proc. SPIE*, 4853, 194
- Rees, D. E. & Semel, M. D. 1979, *A&A*, 74, 1
- Skumanich, A. & Lites, B. W. 1987, *ApJ*, 322, 473
- Wampler, S. 2002, *Proc. SPIE*, 4848, 85